

Thermo-Calc Graphical Mode User Guide

Version 4.0



© 1995-2014 Foundation of Computational Thermodynamics Stockholm, Sweden



Thermo-Calc Graphical Mode User Guide

Contents

1	Introd	uction	3
	1.1	The Thermo-Calc program	3
	1.2	Documentation for Thermo-Calc Graphical Mode	3
		1.2.1 This User Guide	
		1.2.2 Using online help	
		1.2.3 The Thermo-Calc Graphical Examples	4
	1.3	Program overview	5
		1.3.1 Activity types	5
	1.4	Licenses for using Thermo-Calc	6
2	Using	the graphical interface	7
	2.1	The Thermo-Calc Graphical mode interface	7
	2.2	Using the graphical mode interface	7
	2.3	Default options	8
	2.4	Database checker	9
	2.5	License information	10
	2.6	Workflow	10
3	-	the Quick Start wizard	
	3.1	How to use the Quick Start wizard	
4	Worki	ng with Thermo-Calc projects	
	4.1	Using templates	
	4.2	Creating activities and successors	16
		4.2.1 Cloning activities and trees	16
		4.2.2 Manipulating your activity tree and using the grid.	18
	4.3	Performing projects, trees and activities	19
		4.3.1 Status markers in the "Project" window	20
		4.3.2 Using the Scheduler	21
		4.3.3 Status markers in the "Scheduler" window	
		4.3.4 Managing the schedule	
		4.3.5 The Event Log	22
	4.4	Using Thermo-Calc project files	
5	Activit	ties	
	5.1	System definer	
		5.1.1 Predecessors and successors	
		5.1.2 How to select a database and define your elements	
		5.1.3 How to append data from an additional database	
	5.2	Equilibrium Calculator	
		5.2.1 Predecessors and successors	26
		÷	



	5.2.2 Setting conditions for different calculations	26
	5.2.3 Setting conditions – advanced mode	28
	5.2.4 How to calculate with a fixed phase	28
	5.2.5 How to calculate and plot your own functions	30
5.3	Plot renderer	31
	5.3.1 Predecessors and successors	32
	5.3.2 Configuration window settings	32
	5.3.3 Changing the appearance of a plotted diagram	34
	5.3.4 Adding labels	
	5.3.5 Saving your diagram	35
	5.3.6 How to plot several calculations in one diagram	35
5.4	Table renderer	37
	5.4.1 Predecessors and successors	37
	5.4.2 Tabulated results from an equilibrium calculation	37
	5.4.3 Tabulated results from a stepping operation	38
	5.4.4 Setting number format and number of decimal	
	digits 39	
	5.4.5 Setting background colours	39
	5.4.6 Saving tabulated data	39
5.5	Experimental file reader	40
	5.5.1 Predecessors and successors	40
	5.5.2 How to plot an experimental data file	40
5.6	Binary calculator	40
	5.6.1 Predecessors and successors	40
	5.6.2 Configuration window settings	41
5.7	Ternary calculator	42
	5.7.1 Predecessors and successors	
	5.7.2 Configuration window settings	43
5.8	Scheil Calculator	
210	5.8.1 Predecessors and successors	
	5.8.2 Configuration window settings	



1 Introduction

1.1 The Thermo-Calc program

Thermo-Calc is a sophisticated software, database and programminginterface package for performing thermodynamic calculations. It allows you to calculate complex homogeneous and heterogeneous phase equilibria, and plot the results as property diagrams and phase diagrams.

The program fully supports stoichiometric and non-ideal solution models and databases. These models and databases can be used to make calculations on a large variety of materials such as steels, alloys, slags, salts, ceramics, solders, polymers, subcritical aqueous solutions, supercritical electrolyte solutions, non-ideal gases and hydrothermal fluids or organic substances. The calculations can take into account a wide ranges of temperature, pressure and compositions conditions (you can set temperature up to 6000 K and pressure up to 1 Mbar).

There are two interfaces to the Thermo-Calc program, the Console Mode which uses a command line interface and the Graphical Mode which has a graphical user interface (GUI). This User Guide describes the use of the Thermo-Calc program in the Graphical Mode.

1.2 Documentation for Thermo-Calc Graphical Mode

Apart from this document, you can use the following documentation to learn more about how to use Thermo-Calc in the Graphical mode:

Online help in the Thermo-Calc Graphical mode

contains general information about the Graphical mode, information about most "Configuration" window settings, as well as descriptions of two step-by-step examples.

Thermo-Calc Graphical Examples Collection

contains eight example Thermo-Calc project files (*.TCU) that demonstrate a few ways in which you can use Thermo-Calc in the Graphical mode.

TC 3.1 Examples

contains brief descriptions of all the examples in the *Thermo-Calc Graphical Examples Collection*.

Additional documentation and educational materials are also available on Thermo-Calc Software's website.

1.2.1 This User Guide

Target group

This user guide is intended for new users of the Thermo-Calc Graphical mode that are not familiar with its interface. It is expected, however, that such a user does understand the basics of thermodynamics.



Purpose

This *Thermo-Calc Graphical User Guide* is intended to get you started using Thermo-Calc in the Graphical mode. It gives you a brief overview of the program and its underlying structure, describes the GUI, and describes how you define your system of components, set up calculations, run them and visualize the results.

Content

The following conventions will be used:

- Buttons that you can click on in the GUI will be enclosed with "«" and "»", the "much smaller than" and "much greater than" symbols. For example, «Create New Activity».
- Menu items, window titles and field names are enclosed in quotation marks. For example, "Composition Unit".
- The vertical line ("|") indicates menu structure. For example, "select Tools | Options" means that you should select the menu item "Options" from the "Tools" menu.

1.2.2 Using online help

You can access online help information in several ways:

- Select Help | Help Contents to open a list of online help contents in your default web browser. Click "Graphical Mode" to get access to all the help pages that are available in the GUI.
- In one of the main windows of the Graphical Mode GUI, the "Configuration" window, you can click the help button to view help information regarding the tab that is currently shown in this window. The help information will be shown in your default web browser. The help button looks like this:



1.2.3 The Thermo-Calc Graphical Examples

To learn more about how to use Thermo-Calc, you can open and run the example projects in the *Thermo-Calc Graphical Examples Collection*. These are in the format of Thermo-Calc project files (*.TCU).

The examples are the following:

- 1 Calculating a single-point equilibrium
- 2 Stepping in temperature in the Fe-C system
- 3 The Fe-C phase diagram
- 4 Ternary phase diagram in the Fe-Cr-C system at 1000 K
- 5 The stable and the metastable Fe-C phase diagrams
- 6 Serially coupled equilibrium calculators
- 7 User defined functions
- 8 Scheil and equilibrium solidification



1.3 Program overview

The Thermo-Calc software architecture consists of modules that handle, for example, database retrieval and management, calculation, visualization and diagram plotting. See the *Thermo-Calc Console Mode User Guide* for more information about the modular architecture of the software.

Most of the calculation types that can be performed in the Console mode can also be performed in Graphical mode. However, you can only do data optimization and thermodynamic or kinetic assessments in the Console mode.

The two modes can be run simultaneously, but there is no communication between them. What you do in the Graphical mode will not affect the state of the Console mode session and vice versa. There is one exception to this. The options you set for plotting in the "Results" window or the "Console Results" window are applied to how diagrams are plotted in both modes.

In the Thermo-Calc Graphical mode, calculations are always set up, carried out, and visualized as part of a project. These different steps in your project is performed by different types of activities.

1.3.1 Activity types

The following table gives a brief description of each of the seven available activity types:

Activity type	Description
System Definer	The System Definer activity is used to define a certain thermodynamic system and to read it from file into memory.
(Appended System)	To read data from multiple databases, multiple System Definer activities must be created and linked serially. The successor System Definer activities thus defined will by default be named Appended System.
Equilibrium Calculator	The Equilibrium Calculator activity is used to set thermodynamic conditions and to define axis variables when a series of equilibrium calculations are to be performed in one or more dimensions.
Plot Renderer	The Plot Renderer activity is used to determine the layout of non-text based output.
Table Renderer	A table renderer activity is used for text based output.



Binary Calculator	The Binary Calculator activity can be used for some calculations involving two components only. It can be thought of as a combination of a System Definer activity and an Equilibrium Calculator activity with certain adaptations to simplify the configuration of calculations on binary systems. Note that, to perform this activity successfully, you need a database that was designed for the Binary Calculator, such as the TCBIN database for example.
Ternary Calculator	The Ternary Calculator activity can be used for some calculations involving three components. It can be thought of as a combination of a System Definer activity and an Equilibrium Calculator activity with certain adaptations to simplify the configuration of calculations on ternary systems. Note that, to get a reliable result from performing this activity, you need a database that contains fully assessed binary and ternary systems.
Scheil Calculator	The Scheil Calculator activity is used to perform Scheil-Gulliver calculations (also known as Scheil calculations). A default Scheil calculation is used to estimate the solidification range of an alloy assuming that i) the liquid phase is homogeneous at all times and ii) the diffusivity is zero in the solid. However, it is possible to disregard the second assumption for selected components.

1.4 Licenses for using Thermo-Calc

You can start Thermo-Calc without a valid Thermo-Calc license, but you will not be able to do any calculations. To use Thermo-Calc, you need a valid standalone "LSERVRC" license file (of you have a standalone installation of Thermo-Calc) or access to license server with a valid network "LSERVRC" license file (if you have a network client installation).

If you have a network client installation of Thermo-Calc, then you may not be able to do any calculations even if you have access to a license server with a valid network license file. This is because other clients that are part of your network installation may have "checked out" all instances of Thermo-Calc that the network license allows you to run simultaneously.




2 Using the graphical interface

This section introduces you to the GUI and describes the basic workflow of the program.

2.1 The Thermo-Calc Graphical mode interface

The GUI consist of four types of windows and a toolbar. The following screen shot shows the GUI with the standard window layout.

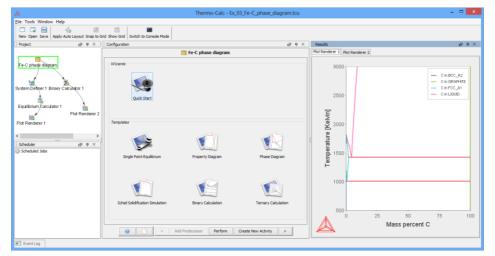

There are five windows in Graphical mode:

"Project"	In this window, you create, manipulate and navigate between the activities that make up a project.
"Scheduler"	This window shows information about jobs, such as calculations, that are being performed or that are scheduled to be performed. You can cancel scheduled jobs and if a job has failed, then you can view information about the error.
"Configuration"	This window shows the settings that you can configure for the currently selected activity.
"Results"	This window shows the results of a calculation, either plotted as a diagram or displayed in table format.
"Event Log"	This window is by default closed, but is opened when a calculation is run. It shows detailed information about the progress of the calculation.

2.2 Using the graphical mode interface

The windows in Thermo-Calc can be fixed or free-floating. When fixed, it can also be set to auto-hide, in which case the window becomes minimized if you select another window. The minimized window is then shown either along the bottom or sides of the Thermo-Calc window. A free-floating window is shown on top of the other windows and can be moved outside the frame of Thermo-Calc window.

By default, the windows are fixed and open, except the "Event Log" window which is set to auto-hide by default.

You can always go back to the standard window layout, by selecting "Reset Windows" from the "Windows" main menu.

You can rearrange, resize, minimize and close windows. At the top right corner of each window, you find some of the following buttons.

Button(s)	Description
J	Click to toggle on/off free-floating
₽ ₽	Click to toggle on/off auto-hide.
_	Click to minimize an open window that has auto-hide turned on. Note that the window will automatically be minimized if you select another window.
×	Click to close the window. You can open the window again from the "Window" main menu.

2.3 Default options

You can set general settings for Thermo-Calc Graphical mode, as well as default settings for any new activities that will be created, in the "Options" window. To open this window, select "Options" from the "Tools" main menu. The tabs and panes that are relevant for Thermo-Calc Graphical mode are briefly described in the table that follows:

Tab / pane	Description
General	Here you can select whether to turn on tooltips information. If "Tooltips enabled" is selected, then a small text box will appear when you hold the cursor still above some buttons or other items.
	Here you can also select which language that will be used in the program, and change the appearance of the program ("Look and feel").
	In the "Database directory" field, specify in which directory the Thermo-Calc database directory called "data" can be found. Note that you are not supposed to specify the path to where the database files can be found (that is, in the "data" directory), but the path to the directory that contains the "data" directory.



	Adjust the "Log Level" slide bar to get more or less information presented in the "Event Log" window.
Default units	Here you can specify which unit that will be used as the default for temperature, pressure, amount, composition, energy, volume, and density.
Graphical Mode> Activities>Calculation	Here you can change the default settings for the Equilibrium Calculator. These settings can also be changed locally in each Equilibrium Calculator for that particular activity (in the "Options" tab in the "Configuration" window).
Graphical Mode> Activities>Plotting	Here you can change the default settings for any diagrams that will be plotted. Note that these settings are shared with the Console Mode. Any changes you make here will also apply to the default settings on the Console Mode>Plotting tab in the "Options" window (and vice versa).
	You can also change the settings for plotting locally for a certain Plot Renderer tab in the Console Results window, by right-clicking on a plot and selecting "Properties" from the pop-up menu.
	In addition, the colour, stroke (solid/dashed/dotted/dash_dot) and line width of a particular series of lines in a plot can be changed by clicking one of the lines in that series.
Graphical Mode> Activities>Tabulation	Here you can change the default setting for the Table Renderer activity.

2.4 Database checker

The Thermo-Calc software package includes a program for checking that the syntax of Thermo-Calc database files is correct. This program is intended for users who develop and manage database. As a normal user of Thermo-Calc, you will probably never need to use the program.

To launch the DatabaseChecker application, select "Database Checker" from the "Tools" main menu.



2.5 License information

To show information about the licenses you have for using Thermo-Calc, select "Show License Info" from the "Help" main menu. This will open the License Information window.

If you are running a network client installation of Thermo-Calc, you can see how many of the client instance licenses that are currently "checked out" and how many of them that are left. You can also see which clients computers it is that have checked these client instance licenses out.

The following screenshot shows an example of the kind of information that the License Information makes available on a network client installation. The table shows the various license types that the license server makes available (in this case, the license server is "pumbaa.thermocalc.se").

server loc server por	-			,					-
license feat	ures on	license s	erver	pumbaa.tl	hermocalc.	зe			
Feature	version	number of	days	sharing	time	site		in	Ξ
		licenses			tampering				
		99							
DIC FULL	8.000	99	Inf	host	none	192.	168.29.*	6	
test		test	-xp-32	2			local		
test		test	-cento	08-6-4-32	.thermocal	c.s	:1		
test		test	-ubunt	tu-12-04-0	64		:1		
test		test	-opens	suse-12-3-	-64.thermod	cal	:1		
test		test	-cento	03-6-4-64	.thermocal	c.s	:1		
test		test	-opens	suse-12-3-	-32.thermod	cal	:1		
PRISMA FULL	1.000	99	Inf	host	none	192.	168.29.*	0	
PRISMA FULL	3.000	99	Inf	host	none	192.	168.29.*	0	
TC DLL	5.000	99	Inf	host	none	192.	168.29.*	0	
TC DLL	7.000	99	Inf	host	none	192.	168.29.*	0	
TC FULL	5.000	99	Inf	host	none	192.	168.29.*	0	
TC FULL	7.000	99	Inf	host	none	192.	168.29.*	1	
_		apol					local		

The "number of licenses" column shows how many instances of each license type that can be checked out simultaneously, and the "in use" column shows how many of those instances that are currently checked out.

Under each license type with instances checked out, a list of who has checked out each of those instance is also shown. An instance is checked out when an Equilibrium Calculator activity is created, and checked back in when that Equilibrium Calculator is removed. In Console Mode, an instance is checked when a user enters the POLY module and is checked back in when the user exits the POLY module.

For example, in the preceding screenshot, you can see that the user "johanj" has checked out a TC_FULL license.

2.6 Workflow

You can set up a whole "tree" in the Project window and then perform all the activities at once, or create and perform one activity at a time.

The typical workflow is the following:



- 1 Define your system: Create a System Definer activity, which allows you to select a database and select which elements to have as components in your system. The database and elements are selected in the "Configuration" window.
- 2 Set up and run your calculation: Create an Equilibrium Calculator activity, which allows you to set the conditions for your calculation (temperature, pressure, etc.) and set axis variables if you want to make a property or phase diagram. The settings of activities are specified in the "Configuration" window.
- 3 Visualize the results: Create either a Plot Renderer or a Table Renderer activity that present the results of your calculation in diagram or table format. The results are shown in a "Plot Renderer" or a "Table Renderer" tab in the "Results" window. Note that if you do not visualize the results by performing a Plot Renderer or a Table Renderer, then you will not see any calculation results at all, even if you have performed an Equilibrium Calculator.



3 Using the Quick Start wizard

The "Quick Start" wizard allows you to quickly get started using Thermo-Calc in the Graphical mode, even before you have any knowledge about how to work with Thermo-Calc projects. You can quickly set up, calculate and visualize any of the following:

- Single-point equilibrium
- Property diagram
- Phase diagram
- Scheil solidification simulation

3.1 How to use the Quick Start wizard

This section describes how to calculate an equilibrium, a property diagram, a phase diagram, or a Scheil solidification simulation using the Quick start wizard.

Pre-requisites

None.

Procedure

To set up, perform and visualize a calculation using the Quick Start wizard, follow these steps:

Step Action

1 Click «Quick Start» in the "Configuration" window.



If you cannot see the «Quick Start» button, then make sure that "My Project" node is selected in the "Project window".

- 2 Select which type of calculation you want to perform in the "Select Project Type" window. Then click «Next >».
- 3 Select which database to use in the "Database" menu.
- 4 From the table of elements, select which elements you wish to include as components in your system.

Alternatively, select "Material file" and enter the name of the material file you want to load in the associated field.

Click «Next >».

- 5 In the "Composition unit" menu, select whether to use "Mass percent", "Mole percent", "Mass fraction" or "Mole fraction" to specify the composition of your system.
- 6 Specify the values of the state variables listed under "Condition Definitions".



7 If you are calculating a property or a phase diagram, you must also specify the axis variable(s) of the stepping or mapping operation, as well as minimum and maximum values for the variable(s).

If you are calculating a Scheil solidification simulation, then you must select whether you want to account for back-diffusion of any fast-diffusing elements. For those (if any) elements, select "Fast diffuser".

8 Click «Finish».

The "Event Log" window will now open and show information about the progress of the calculation.

Finally, the diagram is plotted in a "Plot Renderer" tab in the "Results" window. If you have calculated a single-point equilibrium, then a "Table Renderer" tab will show information about the equilibrium.

To save the project, click «Save» on the main toolbar. To save the diagram or table, right-click on the diagram or table and select "Save As" from the pop-up menu.




4 Working with Thermo-Calc projects

This section describes how you create and perform activities for your project, as well as how you manipulate and link various activities in your project.

You work with Thermo-Calc in the Graphical mode by creating, configuring and performing activities within a project. The activities in your project and how they are linked are represented as a tree-structure in the Project window. This window is also where you add new activities. An activity that is located below another activity in a tree is referred to as that activity's 'successor'. An activity that is located above another activity is referred to as that activity's 'predecessor'. A predecessor is performed before the predecessor's successors and its result is fed forward to any successor activities.

For example, to calculate and display a phase diagram, you would create one branch with three linked activities: A System Definer activity linked to an Equilibrium Calculator activity, which in turn would be connected to a Plot Renderer activity.


In the following "Project" window, "Equilibrium Calculator 1" is the successor to "System Definer 1" and the predecessor to "Plot Renderer 1"



Each set of linked activities in your project is called a tree. A result that has been calculated within a tree will be fed as input into the next activity below in the tree. Consequently, if you have an Equilibrium Calculator with another Equilibrium Calculator as its successor, the successor will take the calculation results of the predecessor as the starting values for its calculation.



The following "Project" window shows a project with two trees. Within each tree, settings and calculation results are propagated downward until the calculation and the visualization of the results have been completed. However, the system definitions, settings and calculation results of the two trees are independent of each other.

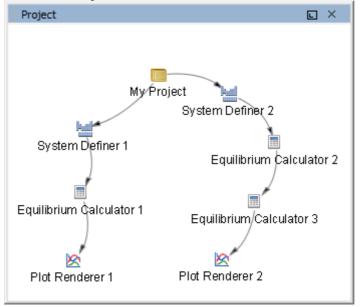

4.1 Using templates

You can quickly create all the activities that are necessary for a certain type of calculation by using a template. The available templates are shown in the "Configuration" window when the topmost "My Project" node is selected in the "Project" window.



When you click on a template button, a whole activity tree appears in the "Project" window. You can then configure and perform the activities or the project.

For example, if you click «Property Diagram», a tree consisting of a System Definer, an Equilibrium Calculator and a Plot Renderer is added to the "My Project" node.

You can also select templates from the "Project" window by right-clicking the topmost "My Project" node, choosing "Create New Activity", and then opening the "Use Template" submenu which will show the available templates.

4.2 Creating activities and successors

You can create a new activity in the following two ways:

 In the "Project" window, right-click an activity and choose "Create New Activity" or "Create New Successor" from the pop-up menu. Select the activity you want to create from the submenu.

Project	о - р ×	Configuration
My Prq		Wizards
wyrre	Create New Activity	System Definer
	Perform Now Perform Later	Binary Calculator Ternary Calculator Experimental File Reader
	Rename	Use Template
	Apply Auto Layout	


2 At the bottom of the "Configuration" window, click «Create New Activity» or «Create New Successor» and select which activity to create from the pop-up menu.

4.2.1 Cloning activities and trees


You can clone a single selected activity or the selected activity and all the activities that succeed it. The predecessor of the selected activity will also be the predecessor of the clone. Cloned activities are configured exactly like the activities that they were cloned from, and any results of calculations or plots are also cloned. To clone a selected activity, right-click the activity and select "Clone" from the pop-up menu.

For example, if you cloned the Equilibrium Calculator in the following project:



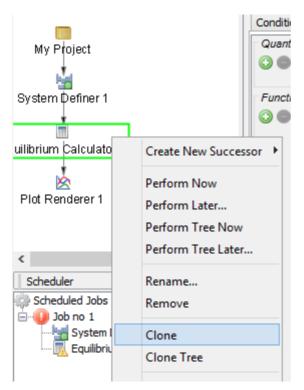

The result will be that another Equilibrium Calculatoris created as a successor to "System Definer 1". The new Equilibrium Calculator will have exactly the same settings for conditions, functions and options as the Equilibrium Calculator from which it was cloned. If the Equilibrium Calculator has been performed already, then the calculation results will also be cloned. If the activity is a Plot Renderer or a Table Renderer, then the plot or table will be cloned.



If you also want to clone all the successor activities that follow a selected activity, then right-click and select "Clone Tree" instead.



Difference between Equilibrium Calculator clones and successors

If you create an Equilibrium Calculator as a successor to another Equilibrium Calculator, then the successor will inherit all the settings for conditions, functions and options from its predecessor. In this respect, it is similar to a clone. However, the successor will be different from a clone in that it will not inherit any calculated results and it will be a successor to the Equilibrium Calculator instead of a successor to its predecessor. The calculated result from an Equilibrium Calculator that is the predecessor to another Equilibrium Calculator will be the starting value for the latter's calculation. The clone of an Equilibrium Calculator on the other hand, will not receive any data as input from the Equilibrium Calculator that it was cloned from.


For an example of how serially coupled Equilibrium Calculators can be used, see example 6 in the *Thermo-Calc Graphical Examples Collection*.

4.2.2 Manipulating your activity tree and using the grid

You can manipulate the project in the "Project" window in various ways.

Selecting activities	Click on an activity to select it. To select several activities, hold down Ctrl while clicking on the activities you want to select. Alternatively, click and hold down the left mouse button while you trace a square around the activities that you want to select. Both the name and the icon that represents an activity must be within the square for it to get selected in this way.
Moving activities	Left-click and hold the activity, then move the cursor.
Zoom	Use the scroll wheel to zoom in and out. Alternatively, right-click in "Project" window and select "Zoom In" or "Zoom Out" from the pop-up menu. To go back to the default zoom, select "Reset Zoom".
Turn on/off grid	To show a grid of light-grey cross hairs overlaid on your project, click «Show Grid» in the toolbar. Click the button again to turn the grid off. Alternatively, right-click in the "Project" window and select "Show Grid".





Snap to grid

If you turn on "Snap to Grid", each activity in the "Project" window will be automatically positioned at a cross-hairs point in the grid. Turn on "Snap to Grid" by clicking «Snap to Grid» in the toolbar or by right-clicking in the "Project" window and selecting "Snap to Grid" from the pop-up menu.

4.3 Performing projects, trees and activities


You can trigger the performance of an activity and all the activities below it in the same tree in either the "Project" window or in the "Configuration" window. In the "Project" window you can also perform a single activity without performing its successors or perform the whole project (all the activity trees).

In the "Configuration" window, click «Perform Tree» to perform the currently selected activity and all the activities below it in the tree. If there are no activities below the currently selected activity, then the button will simply say «Perform» in the "Configuration" window.


Note that whenever you perform an activity, all activities that must be performed as a pre-requisite to the performance of that activity will automatically be performed first. Consequently, if you perform a Plot Renderer with an Equilibrium Calculator and a System Definer above it in the activity tree, then the System Definer and the Equilibrium Calculator will automatically be performed first.

In the "Project" window, you can do any of the following:






Right-click the activity and select "Perform Now", or select "Perform Later" and specify a time delay before the activity is performed.



Perform an activity and all activities below it in the tree

Right-click any activity in the tree that you want to perform and select "Perform Tree Now". Alternatively, select "Perform Tree Later" and specify a time delay before all the activities in the tree are performed.

Perform a project Right-click the "My Project" node and select "Perform Now", or select "Perform Later" and specify a time delay before all the activity trees in your project are performed.



4.3.1 Status markers in the "Project" window

Whether an activity is ready to be performed, is being performed, or has been performed is indicated by status markers overlaid on the activity icons in the "Project" window.

The following table describes the different status markers as they would be shown on System Definer icon.

Status marker	Description
	A yellow triangle indicates that the activity cannot be run. The reason is that the necessary configurations for the activity have not been set or that other pre- requisites have not been met.
1	No status marker means that the activity is ready to be performed and that it has not yet been performed.
	A red circle with a dial (a clock face) indicates that the activity is currently being performed.




1	A green disc indicates that the activity has been
	performed.

4.3.2 Using the Scheduler

The "Scheduler" window shows information about activities that Thermo-Calc is currently performing or will perform shortly. It will also indicate if there is an error during performance and an activity is aborted. If you have set an activity, tree or project to be performed at a later time (with "Perform Later" or "Perform Tree Later") then this scheduled performance will listed as well.

Whenever you trigger the performance of a whole project, tree or individual activity, all the activities to be performed are presented under a "Job" heading. If all the activities belonging to a job are successfully completed the job and its activities disappear from the "Scheduler" window.

If there is an error during the performance of an activity, icons for that job and activity will remain in the "Scheduler" window until you remove them.

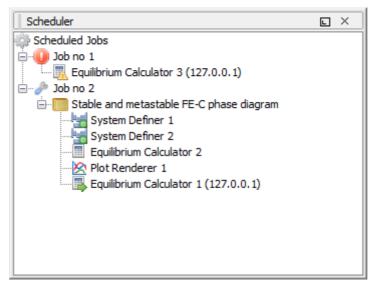

4.3.3 Status markers in the "Scheduler" window

The following table describes what the different status markers means in the "Scheduler" window.

Status marker	Description
	A yellow triangle indicates that there was an error during the performance of the activity.
<u>N</u>	No status marker means that the activity is scheduled to be performed but that Thermo-Calc has not yet begun to perform it.
·	A green right-facing arrow indicates that the activity is being performed.
	A green disc indicates that the activity has already been performed successfully.



4.3.4 Managing the schedule

In the "Scheduler" window, you can cancel scheduled jobs, remove errors and show information about errors.

"Cancel All Jobs"	To cancel all jobs, right-click the "Scheduled Jobs" label or the cogwheel icon, then select "Cancel All Jobs" from the pop-up menu.
"Clear All Errors"	To remove all failed activities and jobs, right-click the "Scheduled Jobs" label or the cogwheel icon, then select "Clear All Errors" from the pop-up menu.
"Cancel Job"	To cancel one specific job, right-click the job label (for example, "Job no 1") and select "Cancel Job" from the pop-up menu.
"Clear Error"	To remove a specific failed job, right-click the job label (for example, "Job no 1") and select "Cancel Job" from the pop-up menu.
"Show Error Log"	To open a window with information about an error, right-click the label for the failed job (for example, "Job no 1"), and select "Show Error Log".

4.3.5 The Event Log

The "Event Log" window is closed by default, but is opened when an activity, tree or project is performed.

Information about what Thermo-Calc is currently doing is shown in blue, and error and warning messages are shown in red.

You can specify how detailed the information in the "Event Log" window on the "General" tab in the "Options" window by opening the "Options" window, selecting "Options" from the "Tools" main menu, clicking the "General" tab and setting the "Log level" slide bar to anything between "Debug" (most detailed) and "Error" (least detailed).

```
EventLog 

V

I4:50:34,751 INFO Cancelling activity: Equilibrium Calculator 1

14:50:36,266 WARN The subprocess completed with status code 2: the execution was
cancelled by the user

14:50:36,376 ERROR Gobbled: 14:50:36,376 ERROR Error when executing the activity:
Error when sending a remote event: Software caused connection abort: socket w
rite error

14:50:36,594 WARN The subprocess completed with status code 2: the exec
ution was cancelled by the user

15:36:25,495 INFO Activity was renamed to Appended System 1
```

4.4 Using Thermo-Calc project files

Thermo-Calc makes use of project files with the file name suffix .TCU. To save your project and all its settings and results, click «Save» on the toolbar. In the "Save" window that opens, you can select whether or not to "Include calculated results in the project file" (by default, this is selected). To open a Thermo-Calc project file, click «Open» on the toolbar and select the project file in the "Open file" window.



You can only have one project file open at a time. However, you can attach the trees from additional project files to the topmost "My Project" node. To append an additional project file in this way, select "Append Project" from the "File" main menu and then open a project file of your choice.



5 Activities

In this chapter, you find a description of each type of activity, brief descriptions of the "Configuration" window settings, and descriptions of some procedures that are tied to specific activities.

5.1 System definer

In a System Definer activity, you select which database to use for retrieving thermodynamic data, and define which elements your system will have as components. You can also select which species to include as well as change the reference temperature and pressure for your components.

5.1.1 Predecessors and successors

Possible predecessors	My Project
	System Definer
Possible successors	System Definer Equilibrium Calculator Scheil Calculator

A System Definer that is a successor to another System Definer by default gets the name "Appended System".

5.1.2 How to select a database and define your elements

This procedure describes the procedure you need to go through to define your system, namely select a database and defining the elements that will be in your system.

Pre-requisites

You must have created and selected a System Definer activity in the "Project" window.

Procedure

To define your system, follow these steps:

Step Action

1 In the "Configuration" window, select the database you want to use from the "Select database" menu near the top of the window.



t database: TCFE7										1								
nts Species Phases and Phase Constitution Components Data Sources Description								abase	ser dat)pen u	C	~			7	TCFE	abase:	dat
				1		-							_					
Periodic Table Alphabetic List Material					ption	-				÷				_	ases a	s Phi	Species	nts
						iterial	M	List	abetic I	Alph		c Table	Periodi	F				
ZE VA																		
H /- He	He							-	ŀ									н
Li Be B C N O F Ne	Ne	F	0	Ν	С	В											Be	Li
Na Mg	Ar	СІ	S	Ρ	Si	AI											Mg	Na
K Ca Sc Ti V Cr Mn Fe Co Ni Cu Zn Ga Ge As Se Br Kr	Kr	Br	Se	As	Зe	Ga	Zn	Cu	Ni	Co	Fe	Mn	Cr	V	Ti	Sc	Са	к
Rb Sr Y Zr Nb Mo Tc Ru Rh Pd Ag Cd In Sn Sb Te I Xe	Xe	I	Te	Sb	Sn	In	Cd	Ag	Pd	Rh	Ru	Тс	Мо	Nb	Zr	Y	Sr	RЬ
Cs Ba * Hf Ta W Re Os Ir Pt Au Hg TI Pb Bi Po At Rn	Rn	At	Po	ві	ъ	ті	Hg	Au	Pt	Ir	Os	Re	w	Та	Hf	*	Ва	Cs
Fr Ra ** Rf Db Sg Bh Hs Mt Ds Rg Cn Uut Fl Uup Lv Uus Uuo	Uuo	Uus	Lv	Uup	FI	Uut	Cn	Rg	Ds	Mt	Hs	Bh	Sg	Db	Rf	**	Ra	Fr
*Lanthanide series La Ce Pr Nd Pm Sm Eu Gd Tb Dy Ho Er Tm Yb Lu	Lu	Yb	Tm	Er	ю	Dy	ть	Gd	Eu	Sm	Pm	Nd	Pr	Ce	La	eries	hanide s	Lant
** Actinide series Ac Th Pa U Np Pu Am Cm Bk Cf Es Fm Md No Lr	Lr	No	Md	Fm	Es	Cf	Bk	Cm	Am	Pu	Np	U	Pa	Th	Ac	ries	tinide se	Ac

2 In the "Elements" tab, click the elements in the periodic table (or on the alphabetic list) that you want to include in your system.

If required, you can change species, phases or components in the other tabs.

3 If you want to perform the System Definer activity immediately and retrieve thermodynamic data about your system, click «Perform».

5.1.3 How to append data from an additional database

If you want to use thermodynamic data from several databases, you can create extra System Definers as successors to your first System Definer.

Pre-requisite

You must already have created a System Definer.

Procedure

To append data from additional database, follow these steps:

Step Action

1 In the "Project" window, right-click the System Definer to which you want to append thermodynamic data, choose "Create New Successor" in the pop-up menu, and select "System Definer" from the submenu.

> Alternatively, select the System Definer in the "Project" window, and then click «Create New Successor» at the bottom of the "Configuration" window. Select "System Definer" from the pop-up menu.

> This will create an Appended System activity, which is linked to a System Definer predecessor.



2 In the "Configuration" window for the Appended System, select which database you want to append thermodynamic data from, regarding which components, phases, etc.

5.2 Equilibrium Calculator

An Equilibrium Calculator allows you to set the conditions for, and perform, a calculation. The "Configuration" window for an Equilibrium Calculator has three tabs:

"Conditions" tab	Here you set the conditions for your calculation that define the stepping or mapping axis variables. This tab can be viewed in a simplified mode and in an advanced mode.
"Functions" tab	Here you define your own quantities and functions, which you then can calculate and plot.
"Options" tab	Here you can modify various numerical settings that determine how equilibria are calculated, as well as how stepping and mapping calculations are performed.

5.2.1 Predecessors and successors

Possible predecessors	System Definer Equilibrium Calculator
Possible successors	Plot Renderer Table Renderer Equilibrium Calculator

An Equilibrium Calculator that is the successor of another Equilibrium Calculator inherits all the "Configuration" window settings of the predecessor.

For an example of how serially coupled Equilibrium Calculators can be used, see example 6 in the *Thermo-Calc Graphical Examples Collection*.

5.2.2 Setting conditions for different calculations

Conditions and axis variables are set in the "Conditions" tab of the "Configuration" window. There you can specify the conditions and axis variables you want to use for your calculation. The tab can be viewed in two modes, the simplified mode (default) or the advanced mode.

What conditions you have to set depends on the type of calculation you intend to perform.

For examples of how various kinds of calculations can be set up using an Equilibrium Calculator, see the *Thermo-Calc Graphical Examples Collection*: example 1 is an example of a single-point equilibrium calculation; example 2 an example of a stepping calculation; and example 5 is an example of a mapping calculation.



Configuration							
Equilibrium Calculator 1							
Conditions Functions Op	Conditions Functions Options						
Composition unit Mass per	cent 👻	Switch to advanced mode					
Condition Definitions		1					
Temperature	Kelvin 👻	1000.0					
Pressure	Pascal 🗸	10000.0					
System size	Mole 👻	1.0					
Composition	Fe	99.99					
Composition	с	0.01					
Calculation Type							
Axis Definitions							
Quantity Min	Max	Step Division Type					
Temperature 👻 500.0	3000.0	50.0 Linear - min no. of steps 👻					
Mass perc O.0	100.0	50.0 Linear - min no. of steps 👻					
	Add Predeces	sor Perform Tree Create New Successor >					

The following table briefly describes what you can set on the "Conditions" tab in simplified mode. More advanced options are available if you click «Switch to advanced mode».

Setting or condition	Description
"Composition unit"	Select whether to use mass percent, mole percent, mass fraction or mole fraction when defining the composition of your system.
Condition definitions "Temperature" "Pressure" "System size" "Composition"	Specify the values (and units) of the different state variables.
Calculation type "Single equilibrium" "Property diagram" "Phase diagram"	Select whether to calculate a single equilibrium (no axises), a property diagram or a phase diagram.
Axis definitions (X-axis) (Y-axis)	To calculate a property or phase diagram, define the axis variable or the two axis variables. When you define an axis, select which state variable you want the stepping/mapping to apply to and set the minimum and maximum values.

"Step Divison" and "Type"	If you set "Type" to "Linear - min no. of steps", then the "Step Division" value specifies at minimum number of steps that will be calculated between the minimum and maximum value during the stepping/mapping operation.
	If you set "Type" to "Linear - max step size", then the "Step Division" sets the maximum size of each step.
	If you set "Type" to "Logarithmic - scale factor", then "Step Division" specifies the scale factor of a logarithmic function that distributes the steps from the initial equilibrium to the minimum and maximum values you have defines.
"Normal" / "Separate phases" / "T-Zero"	To do the stepping operation along an axis one phase at a time, select "Separate phases".
	If you want to calculate the T ₀ -line, where the Gibbs energy for each phase is the same, then select "T-Zero".

5.2.3 Setting conditions – advanced mode

In advanced mode, you can add and remove conditions as you see fit. Furthermore, you can define additional axis definitions beyond the two that you can set in simplified mode. However, the number and types of conditions that you set must still conform to the Gibbs' phase rule (see *Thermo-Calc Educational Material*). The "Number of missing conditions is" field, at the top of the tab shows how many conditions that you have left to set. If the number is negative, then you need to remove that number of conditions.

The next section demonstrates how to calculate and plot a diagram with a fixed phase in order to find out, for example, at what temperature a material starts to melt.

5.2.4 How to calculate with a fixed phase

This section describes how you use the advanced mode to set a certain phase to be fixed at a certain amount. This allows you to, for example, find out at what temperature you material starts to melt. If you set the phase to be fixed to liquid phase at zero amount, and leave the temperature state variable undefined, then you can calculate at what temperature your material will enter a state where the liquid phase is no longer zero (that is when it will start to melt).

When you perform an equilibrium calculation with a fixed phase, it is recommend that you do this in an Equilibrium Calculator that is the successor to an Equilibrium Calculator that performs an ordinary equilibrium calculation for which you roughly estimate the value of the condition you are interested in. This will provide your fixed phase calculation with better starting values.



Pre-requisites

You must have created an Equilibrium Calculator and you must have this activity selected in the "Project" window.

Procedure

To make a calculation with a fixed phase, follow these steps:

Step Action

1 In the "Configuration" window, click «Switch to advanced mode».

If you have set "Default calculation mode" to "Advanced" in the "Calculation" tab of the "Options" window, then the "Configuration" window will be in advanced mode by default, see section 2.3.

- 2 Click the green "+" button to add a condition.
- 3 Select "Fix phase" from the first menu.
- 4 Select the phase that you want to fix in the second menu, and set the amount of that phase you want to fix the phase to. For example, if you want to know when your material will start to melt, you can set the phase to "LIQUID" and the value to "0.0", as illustrated below:.

Conditions Functions Options		
Number of missing conditions is -1		Switch to simplified mode
Condition Definitions		^
○ ○ ▼ Temperature ∨	Kelvin 🗸 1000.0	
O	LIQUID V 0.0	

Above the condition definitions, the "Number of missing conditions is" field will now probably show "-1". This means that you must remove one condition.

5 To remove a condition, you can either click the red "-" button, or just unselect it by clicking in the tick-box. For example, if you want to know at what temperature your material will start to melt, then you cannot have temperature fixed. In the following screen shot, the temperature condition has been unselected.

Conditions Functions Options		
Number of missing conditions is 0		Switch to simplified mode
Condition Definitions		^
😳 😑 🔲 Temperature	✓ Kelvin → 1000.0	
Image: Second	V LIQUID V 0.0	

Note that the "Number of missing conditions is" field now shows "0".

6 When you have set all your conditions, you can perform the Equilibrium Calculator (now or later).



5.2.5 How to calculate and plot your own functions

The "Functions" tab allows you to define your own functions that you can then set to be plotted in a Plot Renderer. This section shows how you can do this.

For an example of how you can use functions that you yourself define, see example 7 in the *Thermo-Calc Graphical Examples Collection*.

Pre-requisites

You must have created an Equilibrium Calculator and you must have this activity selected in the "Project" window.

Procedure

To define your own function and set up a Plot Renderer to plot this function, follow these steps:

Step Action

- 1 In the "Configuration" window, click the "Functions" tab.
- 2 Under "Quantity Definitions", define any number of quantities. These quantities are referred to as "Q1", "Q2", "Q3" and so on. When you have defined a quantity, you can use it to define functions under "Function definitions".

Configuration		×
Equilibriu	um Calculator 1	
Conditions Functions Options		
Quantity Definitions		
Q1 = Amount of phase	No normalization 🗸 LIQUID 🗸 Mole 🗸	
Function Definitions		
ⓒ ● ✔ fraction_solid = 1-Q1		
Add Predecessor	Perform Create New Successor >	

In this screen shot, the quantity Q1 has been defined as the amount of liquid phase. This quantity is then used to define a function called "fraction_solid", which gives as its output the fraction of solid phase (that is 1-Q1)

- 3 Under "Function Definitions", define as many functions as you need. Enter the name of each function in the left field before the equal sign ("="), and enter the function itself in the right field after the equal sign. Note that you can also use Console Mode syntax when entering the function. For example, the function above could have been entered as "1-NP(LIQUID)".
- 4 To set up a Plot Renderer so that it will plot the function you have defined, create a Plot Renderer as a successor to the Equilibrium Calculator in which you have defined the function.



5 In the tab for the Equilibrium Calculator that contain the function, set one of the axis variables to "Function", then select the name of the function you have defined from the menu. In the following screen shot, the Y-axis has been set to plot the value of the function "fraction_solid".

Configuration	
🖄 Plot Renderer 1	
Save Diagram Show Triangular Show Grid Switch Axes	
Equilibrium Calculator 1	
Tie lines: 0 - Legend option: Axis quantity V	
X Axis	
Axis variable: Temperature v Kelvin v	
Axis type: Linear V	
Limits: 1500.0 to 1700.0	
YAxis	
Axis variable: Function v fraction_solid v 1-Q1	
Axis type: Linear V	
Limits: 0.0 to 1.0 🖌 Automatic scaling	
Add Predecessor Perform Create New Successor	>
<	>


When run, the Plot Renderer will plot the value of your function.

5.3 Plot renderer

The Plot Renderer allows you to set the plotting axis variables for property and phase diagrams.

Several Plot Renderer activities (as well as Table Renderer activities) can be shown in the "Results" window as different tabs, as the following screen shot shows:



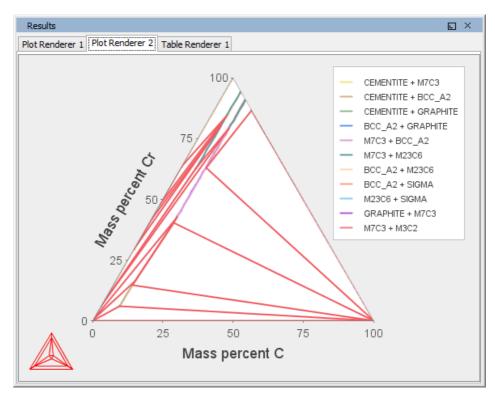

5.3.1 Predecessors and successors

Possible predecessors Equilibrium Calculator Binary Calculator Ternary Calculator Scheil Calculator Experimental File Reader

Possible successors None

The configurations that can be set in the "Configuration" window for a Plot Renderer will vary depending on which kind of predecessor it is created from.

A Plot Renderer can have several predecessors (if you want to plot several calculations in the same diagram), in which case there will be several tabs in the "Configuration" window, one for each predecessor.

5.3.2 Configuration window settings

The following screenshot shows the "Configuration" window for a Plot Renderer that is the successor of an Equilibrium Calculator.



Configuration		
	le Plot Renderer 1	
	▲ Ⅲ 12	
Save Diagram Show	w Triangular Show Grid Switch Axes	
🖄 Equilibrium Cald	culator 1	
Tie lines: 1	Legend option: Axis quantity 🗸	
XAxis		
Axis variable: Cor	mposition v Cr v Mass percent v	
Axis type: Line	ear 🗸	
Limits: 0.0	to 100.0 step 10.0 Automatic scaling	
Y Axis		
Axis variable: Ten	mperature v Kelvin v	
Axis type: Line	ear 🗸	
Limits: 500	0.0 to 3000.0 step 250.0 Automatic scaling	
0	Add Predecessor Perform Create New Successor	>

The following table briefly describes the configurations that can be set in the "Configuration" window.

Setting	Description
»Show Triangular»	Display the diagram in triangular form, with the X-axis along the base and the Y-axis along the left side. Such a diagram is often useful if you want to plot the fractions of two components in a ternary diagram.
»Show Grid»	Overlay a grid on the diagram.
»Switch Axes»	Show the plotting X axis variable on the diagram's Y-axis, and the Y axis variable on the diagram's X- axis.
Tie lines	Select how many tie lines that will be plotted in the diagram. Every <i>n</i> th number of tie line will be plotted, where <i>n</i> is the number you set here. Consequently, the higher the number, the fewer the number of plotted tie lines in your diagram.



	Note that this setting is not present if the Plot Renderer is a successor to a Scheil Calculator or to an Equilibrium Calculator where only one axis has been defined and varied (that is, an Equilibrium Calculator that has performed a stepping calculation).
Legend option	Select whether the diagram's legend should display the "Stable phases" or the "Axis quantity".
Axis variable	Set which state variable that you want plotted along the X-axis and the Y-axis.
Axis type	Select what type of scale to use on the axis. Choose between "Linear", "Logarithmic", "Logarithmic 10" or "Inverse".
Limits	Specify the range along the axis that should be shown in the plot by setting the minimum and maximum values of the axis variable. You can also determine the step size between the tick marks along each axis. Alternatively, select "Automatic scaling".

5.3.3 Changing the appearance of a plotted diagram

To change the appearance of your diagram, right click on the diagram and select "Properties" from the pop-up menu. This will open up a Plot Properties window. Here you can, for example, change the fonts and colours used, and enter a title for your diagram.

You can also change the colour, stroke (solid/dashed/dotted/dash_dot) and line width of a particular series of lines in the plot by double-clicking one of the lines in the series. In this way, you can also toggle whether data points should be shown or not for a series of lines. The crosshair cursor turns into a cursor resembling a pointing hand when it is placed over a line that can clicked but if you hold down Ctrl, this will not happen (the cursor will continue to be shown as a crosshair).

To configure the default settings for plotting, select "Options" from the "Tools" main menu and open the "Plotting" tab under Graphical Mode>Activities.

5.3.4 Adding labels

To add a label text at a certain point in the diagram, right click on that point, and select "Add Label" from the pop-up menu. This will open the "Add Label" window.



The suggested label specifies the names of the stable phases at the coordinate you clicked on. Once a label has been created, you can select it and move it around on top of your diagram. If you have selected "Show anchor", there will always be an arrow from the label point to the coordinates that you initially right-clicked on when you created the label.

If you do not want the label to be oriented horizontally in the Plot Renderer tab, then you can specify the number of degrees that it should be rotated in the "Rotation angle" field.

5.3.5 Saving your diagram

To save a diagram, click «Save Diagram» at the top of the "Configuration" window. Alternatively right-click the diagram in the "Results" window and select "Save As" from the pop-up menu.

5.3.6 How to plot several calculations in one diagram

It is possible to plot several calculations in one and same diagram by adding extra predecessors to the Plot Renderer activity.

For an example of a project in which several calculations are plotted in one diagram, see example 5 in the *Thermo-Calc Graphical Examples Collection*.

Pre-requisites

To plot several calculations in one diagram, you must have, in addition to the Plot Renderer's original predecessor, at least one extra possible Plot Renderer predecessor in your project. The extra predecessor can be an Equilibrium Calculator, a Binary Calculator, a Ternary Calculator, a Scheil Calculator or an Experimental File Reader.


Procedure

To plot several calculations in one diagram, follow these steps:

Step Action

1 Select the Plot Renderer activity in the "Project" window, then click «Add Predecessor» in the "Configuration" window. Alternatively, right-click the Plot Renderer and, from the pop-up menu, choose "Add Predecessor" and select which predecessor to add.



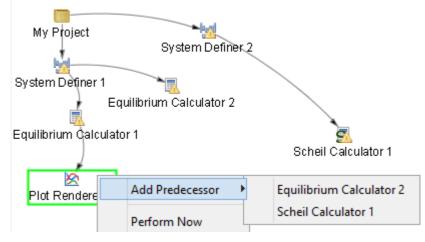


When selected, the extra predecessor becomes linked to the Plot Renderer in the "Project" window. On the Plot Renderer's "Configuration" window, the different predecessors are shown as two different tabs:

	A	##	1	
Save Diagram	Show Triangul	ar Show Grid	Switch Axes	
🖄 Equilibriur	m Calculator 2	🖄 Equilibriur	m Calculator 3	
Tie lines:	1 🜩	Legend optio	n: Axis quan	tity 🗸
X Axis				

2 Configure how you want each calculation plotted on the tabs in the "Configuration" window, then perform the Plot Renderer activity.

The calculations are plotted in the same diagram in a tab in the "Results" window. If any of the axis variables of the plots differ, then the label and scale of all calculations are shown parallel to each other. The following screen shot shows a diagram in which two calculations with different plotting axes variables have been plotted.



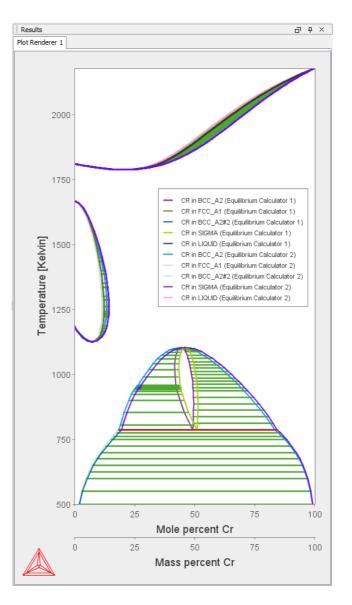

5.4 Table renderer

A Table Renderer visualizes the result of calculation as a table. Several Table Renderer activities (as well as Plot Renderer activities) can be shown in the "Results" window as different tabs.

You can only successfully tabulate the results of a single-equilibrium calculation or a stepping operation. The tabulated data from an equilibrium calculation is very different from the tabulated data from a stepping calculation.

5.4.1 Predecessors and successors

Possible predecessorsEquilibrium CalculatorPossible successorsNone

5.4.2 Tabulated results from an equilibrium calculation

The following tab shows the result of an equilibrium calculation.



Table Renderer 1	Table Rendere	r 2			
Custom					
System Moles	1 00000				
	1.00000	Fa 1			
Mass	55.82663	[Gram]			
Temperature	1000.00000	[Kelvin]			
Total Gibbs Energy					
	24732.95322	[Joules]			
Volume	7.31246E-6	[Cubic meter]			
Component	Mole Fraction	Maco Eraction	Activity	Potential	
Fe	0.99954	0.99990	0.00619	-42276.35352	
С	0.00046	0.00010	0.14013	-16339.51682	
Stable Phases					
	Moles	Mass	Volume Fraction		
BCC_A2#1	1.00000	55.82663	1.00000	Composition and constitution	0
Composition					
Component	Mole Fraction	Mass Fraction			
Fe	0.99954	0.99990			
c	0.00046	0.00010			
- -	0.000.0	0.00010			
Constitution	(Fe) ₁ (C,VA) ₃				
	Constituent	Site Fraction			
Sublattice 1:					
	Fe	1.00000			
Sublattice 2:					
	VA	0.99984			
	c	0.00016			
	-				

For each stable phase that is listed, you can select in the menu displaying "Composition and constitution" in the screen shot how much information you want to view. In the preceding screen shot, the maximum amount of information is shown, that is, information about both composition and constitution.

5.4.3 Tabulated results from a stepping operation

The following tab shows the results of a stepping calculation.



	Table Renderer 2			_	_
Temperature [Kelvin] 16/0.00000	Amount of LIQUID [Mole]	Amount of FCC_A1 [Mole]	Amount of BCC_A2 [Mole]	A	ı.
		1.00000			
1675.05758		1.00000			
1675.05758		1.00000	0.00000E0		
1680.00000		0.30541	0.69459		
1684.78866		0.00000E0	1.00000		
1684.78866			1.00000		
1690.00000			1.00000		
1700.00000			1.00000		1
1710.00000			1.00000		1
1720.00000			1.00000		
1730.00000			1.00000		
1740.00000			1.00000		
1750.00000			1.00000		
1760.00000			1.00000		1
1770.00000			1.00000		1
1780.00000			1.00000		1
1790.00000			1.00000		1
1800.00000			1.00000		1
1806.61591			1.00000		1
1806.61591	0.00000E0		1.00000		1
1810.00000	0.75046		0.24954		1
1810.19674	1.00000		0.00000E0		1
1810.19674	1.00000				•

Defining columns

You set which columns that you want the table to contain in the "Configuration" window

		Table Renderer 1
Save table	Decimal digits: 5 🗢	Number format: Auto 🗸
Columns	Temperature	✓ Kelvin ✓
00	Amount of phase	✓ No normalization ✓ All phases ✓ Mole ✓

5.4.4 Setting number format and number of decimal digits

The results can be presented in ordinary decimal number format or using normalized scientific notion. Set this in the "Number format" menu in the "Configuration" window. You can also select "Auto" in which case Thermo-Calc will use the format that seems to be most appropriate given the tabulated data.

You can also increase or decrease the number of decimal digits that will be used in the table. Do this in the "Decimal digits" field in the "Configuration" window.

5.4.5 Setting background colours

By right-clicking a Table Renderer tab in the Results window, and selecting "Properties" from the pop-up menu, you can change the background colours of the table.

5.4.6 Saving tabulated data

To save all the data in a table as a plain text file, click «Save table» in the "Configuration" window or right-click in the table in the "Results" window and select "Save As" from the pop-up menu.



To copy the data from a single cell of a table to the clipboard, right-click the cell and select "Copy" from the pop-up menu. To copy the whole table to the clipboard, select "Copy all".

Note that data that is saved is the data that is shown in the Table Renderer tab. Data that has been calculated but which is not displayed there will not be saved.

5.5 Experimental file reader

The Experimental File Reader activity can only be created from the top "My Project" node. This activity allows you to read an experimental data file (*.EXP). Such a file contains information specifying a plotted diagram, written in the DATAPLOT graphical language. See the *DATAPLOT User Guide* for more information.

5.5.1 Predecessors and successors

Possible predecessorsMy projectPossible successorsPlot Renderer

5.5.2 How to plot an experimental data file

Step Action

- 3 Right-click "My Project", and choose "Experimental File Reader" from the "Create New Activity" submenu.
- 4 In the "EXP file" field in the "Configuration" window, enter the name of EXP-file that you want to plot.
- 5 Click «Create New Successor» in the "Configuration" window and select "Plot Renderer". Alternatively: right-click the experimental file reader activity in the "Project" window and choose "Plot Renderer" from the "Create New Successor" submenu.
- 6 Click «Perform» in the "Configuration" window or right-click the plot renderer activity that you just created in the "Project" window.

5.6 Binary calculator

A Binary Calculator can be used for some calculations involving two components. You can think of this activity as a combination of a System Definer and an Equilibrium Calculator, but designed to simplify setting up and performing calculations on binary systems.

The Binary Calculator relies on some specifications that are not supported by all databases. You therefore need a database that was designed for the Binary Calculator, such as the TCBIN database for example.

For an example of how a Binary Calculator can be used in a project, see example 3 in the *Thermo-Calc Graphical Examples Collection*.

5.6.1 Predecessors and successors

Possible predecessorsMy ProjectPossible successorsPlot Renderer



5.6.2 Configuration window settings

The following screen shot shows the "Configuration" window of a Binary Calculator activity:

				e Cons		-			alcuk	ator 1	L						
ements				e Cons				-	Binary Calculator 1								
	Phas	es an	d Phas	e Cons		Select database: TCBIN v Open user database											
Н					ements Phases and Phase Constitution Data Sources Description												
н																	
н									ZE	VA							
									1	/-							He
Li	Be											в	С	Ν	0	F	Ne
Na	Mg											AI	Si	Р	s	СІ	Ar
к	Ca	Sc	Ti	V	Cr	Mn	Fe	Co	Ni	Cu	Zn	Ga	Ge	As	Se	Br	Kr
Rb	Sr	Y	Zr	Nb	Мо	Тс	Ru	Rh	Pd	Ag	Cd	In	Sn	Sb	Te	I	Xe
Cs	Ba	*	Hf	Та	W	Re	Os	Ir	Pt	Au	Hg	TI	Pb	Bi	Po	At	Rn
Fr	Ra	**	Rf	Db	Sg	Bh	Hs	Mt	Ds	Rg	Cn	Uut	FI	Uup	Lv	Uus	Uuo
* Lantha	anide se	eries	La	Ce	Pr	Nd	Pm	Sm	Eu	Gd	Tb	Dy	Но	Er	Tm	Yb	Lu
** Actin	nide se	ries	Ac	Th	Pa	U	Np	Pu	Am	Cm	Bk	Cf	Es	Fm	Md	No	Lr
alculation Type) Phase diagram) Gibbs energy curves Temperature Kelvin 1000.0 Activity curves Temperature Kelvin 1000.0 Phase fractions Mole fraction Ta 0.0																	

The following table briefly describes the available settings that must configured before you perform the calculation.

Setting	Description
"Select database"	Select a database that contains specifications dedicated to the Binary Calculator.
"Elements" (periodic table)	In the periodic table, select the two elements that will make up the components of your system.
"Phase diagram"	Select to perform a mapping calculation.
"Gibbs energy curves"	Select the desired temperature; the Gibbs energy curves will be calculated at a constant temperature over the whole composition range.



"Activity curves"	Select the desired temperature; the activity curves will be calculated at a constant temperature over the whole composition range.
"Phase fractions"	Select the desired composition; the phase fractions will be calculated as a function of temperature at a constant composition.

5.7 Ternary calculator

A Ternary Calculator can be used for some calculations involving three components. You can think of this activity as a combination of a System Definer and an Equilibrium Calculator, but designed to simplify setting up and performing calculations on ternary systems.

For an example of how a Ternary Calculator can be used in a project, see example 4 in the *Thermo-Calc Graphical Examples Collection*.

5.7.1 Predecessors and successors

Possible predecessorsMy ProjectPossible successorsPlot Renderer



5.7.2 Configuration window settings

The following screen shot shows the "Configuration" window of a Ternary Calculator activity:

se Constitutio		/	Open		ator databa							
e Constitutio				Descrip	otion	se						
se Constitutio	n Dat	ta Sou	rces									
				ZE	VA							
				ZE	VA							
				- 1	-							He
							в	С	Ν	0	F	Ne
							AI	Si	Ρ	s	CI	A
V Cr	Mn	Fe	Co	Ni	Cu	Zn	Ga	Ge	As	Se	Br	К
Nb Mo	Тс	Ru	Rh	Pd	Ag	Cd	In	Sn	Sb	Te	T	Xe
Ta W	Re	Os	Ir	Pt	Au	Hg	TI	Pb	Bi	Po	At	Rr
Db Sg	Bh	Hs	Mt	Ds	Rg	Cn	Uut	FI	Uup	Lv	Uus	Uu
Ce Pr	Nd	Pm	Sm	Eu	Gd	ть	Dy	Но	Er	Tm	Yb	Lu
Th Pa	U	Np	Pu	Am	Cm	Bk	Cf	Es	Fm	Md	No	L
	Nb Mo Ta W Db Sg Ce Pr Th Pa	Nb Mo To Ta W Re Db Sg Bh Ce Pr Nd	Nb Mo Tc Ru Ta W Re Os Db Sg Bh Hs Ce Pr Nd Pm Th Pa U Np	Nb Mo Tc Ru Rh Ta W Re Os Ir Db Sg Bh Hs Mt Ce Pr Nd Pm Sm Th Pa U Np Pu	Nb Mo Tc Ru Rh Pd Ta W Re Os Ir Pt Db Sg Bh Hs Mt Ds Ce Pr Nd Pm Sm Eu Th Pa U Np Pu Am	Nb Mo Tc Ru Rh Pd Ag Ta W Re Os Ir Pt Au Db Sg Bh Hs Mt Ds Rg Ce Pr Nd Pm Sm Eu Gd Th Pa U Np Pu Am Cm	Nb Mo Tc Ru Rh Pd Ag Cd Ta W Re Os Ir Pt Au Hg Db Sg Bh Hs Mt Ds Rg Cn Ce Pr Nd Pm Sm Eu Gd Tb Th Pa U Np Pu Am Cm Bk	Nb Mo Tc Ru Rh Pd Ag Cd In Ta W Re Os Ir Pt Au Hg Tl Db Sg Bh Hs Mt Ds Rg Cn Uut Ce Pr Nd Pm Sm Eu Gd Tb Dy Th Pa U Np Pu Am Cm Bk Cf	Nb Mo Tc Ru Rh Pd Ag Cd In Sn Ta W Re Os Ir Pt Au Hg TI Pb Db Sg Bh Hs Mt Ds Rg Cn Uut FI Ce Pr Nd Pm Sm Eu Gd Tb Dy Ho Th Pa U Np Pu Am Cm Bk Cf Es	Nb Mo Tc Ru Rh Pd Ag Cd In Sn Sb Ta W Re Os Ir Pt Au Hg TI Pb Bi Db Sg Bh Hs Mt Ds Rg Cn Uut FI Uup Ce Pr Nd Pm Sm Eu Gd Tb Dy Ho Er Th Pa U Np Pu Am Cm Bk Cf Es Fm	Nb Mo Tc Ru Rh Pd Ag Cd In Sn Sb Te Ta W Re Os Ir Pt Au Hg TI Pb Bi Po Db Sg Bh Hs Mt Ds Rg Cn Uut FI Uup Lv Ce Pr Nd Pm Sm Eu Gd Tb Dy Ho Er Tm Th Pa U Np Pu Am Cm Bk Cf Es Fm Md	Nb Mo Tc Ru Rh Pd Ag Cd In Sn Sb Te I Ta W Re Os Ir Pt Au Hg TI Pb Bi Po At Db Sg Bh Hs Mt Ds Rg Cn Uut FI Uup Lv Uus Ce Pr Nd Pm Sm Eu Gd Tb Dy Ho Er Tm Yb Th Pa U Np Pu Am Cm Bk Cf Es Fm Md No

The following table briefly describes the available settings that must configured before you perform the calculation.

Setting	Description
"Select database"	Select a database that contains specifications dedicated to the Ternary Calculator.
"Elements" (periodic table)	In the periodic table, select the three elements that will make up the components of your system.
"Isothermal section"	Select the desired temperature at which the ternary system will be calculated for the whole composition range.
"Monovariant lines"	The variation of the liquid compositions with temperature will be calculated.



"Liquidus projection"	Select the desired temperature
	range and a temperature interval.
	The projection liquid surface and
	the monovariant lines will be
	calculated over the given
	temperature range.

5.8 Scheil Calculator

The Scheil Calculator activity is used to perform simulations of so-called Scheil (Scheil-Gulliver) solidification processes. By default, a Scheil calculation will result in an estimation of the solidification range of an alloy. The calculation is based on the assumptions that the liquid phase is homogeneous at all times and that the diffusivity is zero in the solid. However, it is possible to disregard the latter assumption for selected components.

For an example of how a Scheil Calculator can be used in a project, see example 8 in the *Thermo-Calc Graphical Examples Collection*.

5.8.1 Predecessors and successors

Possible predecessorsSystem DefinerPossible successorsPlot Renderer

5.8.2 Configuration window settings

. . .

The following screen shot shows a part of the "Configuration" window of a Ternary Calculator activity:

Configuration		
	😴 Scheil Calcula	tor 1
Start temperature	2500.0 Temperature step 1.0 Temperature unit	Kelvin 🗸
Allow BCC → FCC	C Composition unit Mass percent V	
Composition Fe	99.99 Fast diffuser	
Composition C	0.01 Fast diffuser	

The following table briefly describes the settings that must configured before you perform the calculation.

Setting	Description
"Start temperature"	Select a Start Temperature that is higher than the liquidus temperature of the alloy, in other words, the temperature at which the alloy is completely melted.
"Temperature step"	Select a Temperature Step. Decreasing the temperature step will increase the accuracy, but the default value is usually adequate.
"Temperature unit"	Select the temperature unit to be used.



"Allow BCC> FCC"	Select to allow BCC -> FCC transformations in the solidified part of the alloy caused by each of the components that you have specified to be "Fast Diffuser". It is recommended that you only select this for steels.
"Composition unit"	Select the composition unit to be used.
"Composition"	Specify the composition of the alloy.
"Fast diffuser"	Select if you want to allow redistribution of this component in both the solid and liquid parts of the alloy.